



## Message From The Founders

First off we want to say thank you, and that we appreciate the faith you have in our brand to buy our product.

We started Tech Armor with the idea that we would bring high quality products to our customers at a price everyone can afford. We start with the best components available and combine that with support from the best team in the business, our valued Tech Armor Nation, and back it all with the industry best Tech Armor Lifetime Product Replacement Warranty.

If you are anything less than happy with our products, we want to know about it! Your feedback, good or bad, makes us a better brand and lets us serve you better, so please don't keep quiet. Email us at [customersupport@techarmor.com](mailto:customersupport@techarmor.com). We will make sure you are 100% satisfied with your Tech Armor purchase or we will refund you.

**Thank you for your business.**

Joe and Eric  
*Co-Founders*

### INSTALLATION GUIDE

Check out our easy instructions and watch a short video to get the best installation for your new car mount.

[techarmor.com/car-mounts](http://techarmor.com/car-mounts)



# TECH ARMOR®

## Universal Bike Mount

### Package Includes:

Please verify you have the following parts:



## Step 1: Securing the Mount

- a. Put the silicone band to the mount and insert the 4 small, L-shaped pins into the 4 slots on the back of the cradle.
- b. Slide the cradle part down until the 2 pieces click together (you should hear a small click sound).




- c. Rotate the tightening screw on the clamp counterclockwise and remove to completely open the clamp.
- d. Set your mount to the handlebar or frame, re-insert the tightening screw and turn clockwise to secure it in place. (Note: if the mount seems loose after tightening, you can place the included foam pads on the clamp and re-install).



- e. Unlock the tightening screw on the mount hinge and adjust your mount to the best viewing angle.
- f. Turn the tightening screw counterclockwise to lock in your angle.

## Step 2: Securing the Device

- a. Click the one-button release on the side of the cradle to open the side wings.
- b. If you're installing the device in portrait mode, fold down the shelf at the bottom of the cradle.
- c. Place your device in the cradle and wrap the silicone band around each corner.

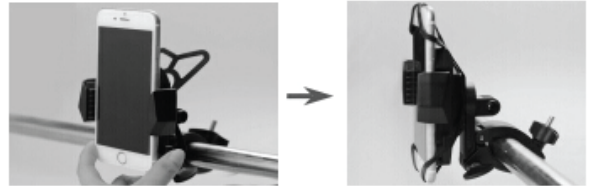

- d. Squeeze both wings together until your device is securely held in the cradle.
- e. To remove your device, simply touch the one-button release on the side of the cradle and the side wings will expand.



## Optional: Action Camera Mount

- a. Add a GoPro or other action camera by inserting the optional camera mount into the switch support and locking the included tightening screw.

